
 REMO-HSE	HVC-100M-04 Art.-Nr. 2432001	Datasheet
	High Voltage Cable	

Description: Unshielded high voltage cable for 100 kV DC for use in electrostatic applications, e.g. liquid paint, powder coating and flocking systems.
Field of application: Electrostatic applications according to EN 50176 / EN 50177
Installation information: Accessory: multilam plug 4 mm

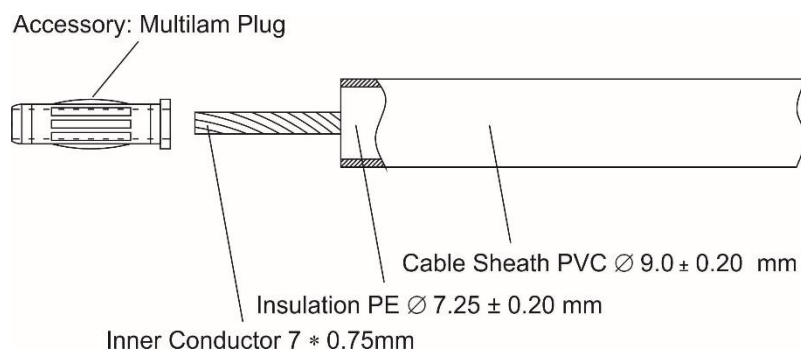

Technical Specifications:

HV-Cable	
Rated Voltage:	100 kV DC
Test Voltage:	120 kV DC acc. to EN 50176/EN 50177
Inner Conductor:	7 × 0.75 mm CU-bare
Insulation:	PE
Cable Sheath:	PVC black
Outer Diameter:	9.0 mm
Bending Radius:	> 15 times outer diameter
Operating Temperature:	-20 to +70°C

Date: 2020-01-15	REMO-HSE Hochspannungselektronik GmbH, Straubinger Str. 28, D - 94372 Rattiszell Tel.: +49 (0) 9964 / 6406 - 0 * Fax: +49 (0) 9964 / 6406 - 20 * Email: info@remo-hse.de	Page 1 / 1
---------------------	---	---------------